

DUAL HIGH-SPEED RESPOOLING MACHINE

Full Guarding & Safety Interlocking Doors **MODEL B12X-006-001**

LEXAN VIEWING OF OPERATIONS



**2" CAPACITY PROGRAMMABLE
HMI/PLC MEASURER**



**TENSION CONTROLLED
PAYOFF**

**DUAL TAKE UP
WITH AUTOMATIC TRAVERSE**

REELPOWER
INDUSTRIAL

5101 S. Council Road, Suite 100 • Okla. City, OK. 73179

405.672.0000 • 405.672.7200 Fax

www.reelpowerind.com

DUAL HIGH-SPEED RESPOOLING MACHINE


Full Guarding & Safety Interlocking Doors **MODEL B12X-006-001**

INCLUDES:


- Dual 2 HP AC Vector Take up drive systems, 0-550 RPM, 480VAC- 3 Phase.
- Automatic AC Vector Ball screw drive level-wind System with dual v-groove guide pulleys and adjustable pitch and guides to .950" diameter material maximum.
- Payout, Electromagnetic Tension Brake with potentiometer control to add tension and control over-spin.
- HMI Electronic, dual level, bi-directional, digital pre-determining counter, with slow-down, stop to length presets, calibration pre-scale and large digital readout.
- Heavy duty steel frame construction with bolt-down tabs.
- Plug-in Shafts for pay-out sizes 3/4", 1", 1 1/4" and 1 1/2" with quick lock collars.
- Dual Plug-in take-up shafts, one (1) 3/4" and one (1) 1.50" diameter with quick lock collars.
- Out of material limit switch, will shut machine down once no more material is detected.
- Machine Guarding Package, dual take up spool guards, allow running one spool with guard closed in place and one guard open for loading and unloading, center measurer guard.



CONTROL PANEL

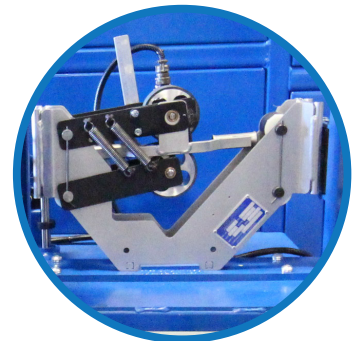

MEASURER

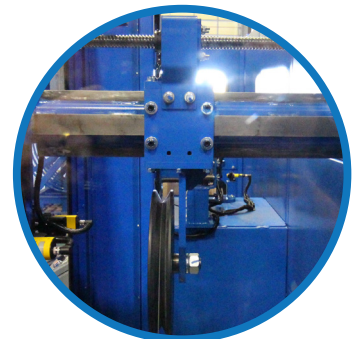

AUTOMATIC LEVEL WIND