

# HJP SERIES PAY-OUTS

## Mobile Pay-Out Machinery

Recommended for use with paying out material from supply reels.

The HJP can improve the efficiency of your reel and cable handling operation. By utilizing a hydraulic jack (standard) or ElectroLift, reels can be raised and lowered with ease, using minimal manpower.



Model HJ5P shown above with a  
10" mechanical tension brake

---

**REELOMATIC**<sup>®</sup>

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149  
405.672.0000 | 405.672.7200 Fax  
[www.reelomatic.com](http://www.reelomatic.com)

# HJP SERIES PAY-OUTS

## Mobile Pay-Out Machinery

### **Optional Benefits**

- Powered Pay-out Feature
- Bolt-on Auxillary Fork Tips
- Mechanical Disc Tension Brake
- Electromagnetic Tension Brake
- LectroLift (Electric/Hydraulic Reel Lifting)
- Special Shaft Bushings
- Measuring Meter
- Manual Shaftless Feature


### **Standard Reel Capacities:**

<b>HJP</b>	20" to 48" dia., 36" wide X 2,500 lbs.
<b>HJ3P</b>	20" to 54" dia., 38" wide X 3,000 lbs.
<b>HJ4P</b>	30" to 60" dia., 38" wide X 4,000 lbs.
<b>HJ5P</b>	38" to 72" dia., 48" wide X 5,000 lbs.
<b>HJ8P</b>	38" to 84" dia., 60" wide X 8,000 lbs.*
<b>HJ10P</b>	40" to 96" dia., 60" wide X 10,000 lbs.*


*\*Units not equipped with ElectroLift include a manual hydraulic lift jack*

<b>HJP15</b>	36" to 108" dia., 72" wide X 15,000 lbs.
<b>HJP20</b>	66" to 120" dia., 72" wide X 20,000 lbs.

*HJ15 & HJ20 include ElectroLift as standard equipment.*

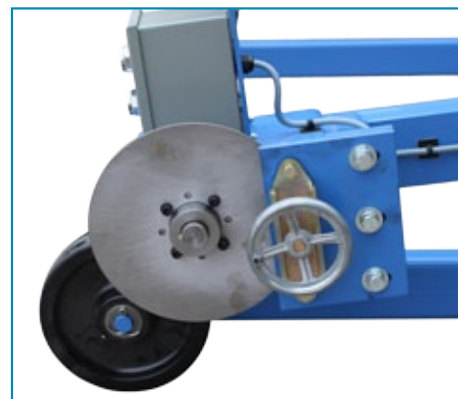

**10" Mechanical Brake**

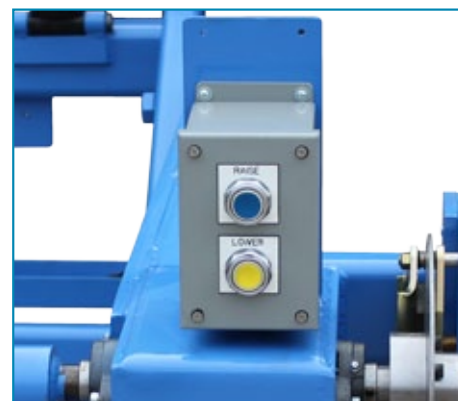

**Front mounted load controls**



**120 Volt Panel Box**

**REEL-O-MATIC**

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149  
405.672.0000 | 405.672.7200 Fax  
www.reelomatic.com