

HSS SERIES



High Speed Spooler and Coiler

Standard Features:

- Capacity 24" diameter x 12" wide x 150 LBs
- Dynamic Braking Feature
- V-Belt Drive
- Remote Safety Foot Switch
- Speed Control Potentiometer
- Illuminated on/off power switch
- 3/8 Inch Drive Pin
- 3/4 diameter Plug in Shaft standard with quick lock collar
- Right or left hand configuration available



Models	AC Drive HP	RPM	Payoff Reel
751	1 HP	0 - 650	500 LB
752	2 HP	0 - 650	1000 LB
753	3 HP	0 - 650	1,500 LB

* When purchased in coiling format it is 0-100 RPM.


HSS SERIES



High Speed Spooler and Coiler



UL CERTIFIED PANEL BOX

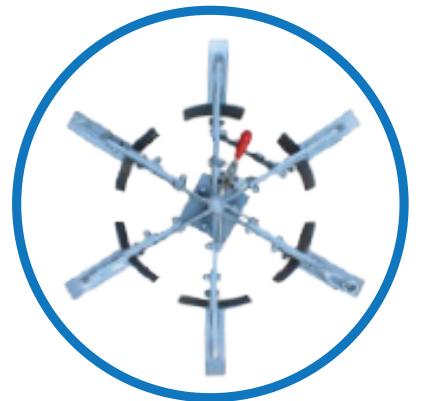

5C COLLAPSIBLE COILER



AUTOMATIC LEVELWIND SYSTEM

Options:

- Coiler - Steel/Aluminum
- Safety Guarding
- Forward/Reverse Option
- Spooler/Coiler Combination Format
- Various Plug in Shafts
- Hour Meter
- Automatic Levelwind System
- Quick disconnect feature for Plug - in shaft or coiler

HSS Collapsible Coiler versions are standard 0-100RPM