

Automatic Cut & Transfer - Coiling & Spooling

EQUIPMENT BENEFITS

The ACT System Offers:

- Higher standard speeds reaching up to 1000 fpm.
- Clean room ready for medical applications.
- Best available package quality with servo driven indexing turret and material guide arm.
- Precise speed and tension controls with all servo drives.
- Superior safety with a standard 'S' guard isolating the operator from the run side, with optional full guarding and failsafe interlocks.
- Maintenance friendly design with easy access to mechanical and electrical components.
- System offers far fewer moving parts over the competition.
- Highly reliable, with longevity built into the design and testing for lower cost of ownership.
- Greater customer flexibility with non-proprietary control system.
- Convenient mobility with optional pneumatic floor locks for movement without tools.
- Best in Class package flexibility for spools or coils, through flange or periphery cutting.
- FDA approved materials used.
- Custom cutter solutions engineered to match material type, diameter, and wall thickness.
- Integrated gripper cutter delivers clean, precise cuts with minimal material waste.

The ACT Systems Innovative Options:

- Auto Coil & Spool Unload
- Auto Packaging (tape, tie, wrap)
- Material Auto Start-up/String-up Assist
- Tension Control & Linear Measurers
- On-Line Printing & Testing

Shown with full metal guard



Model ACT-16


ACT - Automatic Cut and Transfer Coiler and Spooler:

- The ACT System is highly flexible and reliable, running on and offline wire and cable, medical tubing, and plastic profile applications.
- Its standard, non-proprietary control system adapts to numerous applications, with access for operational and maintenance personnel.
- A robust, user friendly color interface provides screens for performance, operation, maintenance, safety, and recipe management.
- Fast return on investment comes from replacing manual machines with improved safety and one operator running multiple lines.

Automatic Cut & Transfer - Coiling & Spooling

Available Options:

- Sampling Arm
- Automatic Coiling Heads
- Automatic Banding & Ejection
- Automatic Stretch Wrap
- Full Guarding (Metal or Lexan)

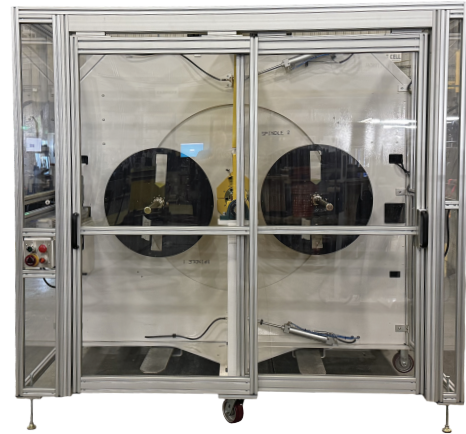

Lexan® polycarbonate guarding also available in place of metal doors for full visibility of the process.



Full Metal Guard configuration



MODEL / DIMENSIONS	ACT-16	ACT-26	ACT-36
MAX DIAMETER in (mm)	16 in (407 mm)	26 in (660 mm)	36 in (914 mm)
MAX WIDTH in (mm)	12 in (305 mm)	16 in (406 mm)	24 in (610 mm)
MAX WEIGHT lbs (kg)	50 lbs (23 kg)	150 lbs (68 kg)	400 lbs (181 kg)
HEIGHT*	80 in (2032 mm)	88 in (2235 mm)	107 in (2718 mm)
WIDTH**	64 in (1626 mm)	91 in (2311 mm)	112 in (2885 mm)
DEPTH***	64 in (1626 mm)	74 in (1880 mm)	94 in (2388 mm)

*Height (how high the unit is in front of the operator) **Width (how wide the unit is in front of the operator) ***Depth (how deep the unit is when viewing from the end)